


10-23-00

A

10/20/00

Please type a plus sign (+) inside this box 

PTO/SB/05 (08-00)

Approved for use through 10/31/2002 OMB 0651-0032

U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	NPA053US
First Inventor	SIMON ROBERT WALMSLEY
Title	METHOD AND SYSTEM FOR MAP AND GLOBE NAVIGATION
Express Mail Label No.	EK285768953US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 32]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 3]
5. Oath or Declaration [Total Pages 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ paper
 - c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☐ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No. _____ / _____

Prior application information

Examiner _____

Group / Art Unit. _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.


18. CORRESPONDENCE ADDRESS☒ Customer Number or Bar Code Label

24011

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	KIA SILVERBROOK				
Address	393 Darling Street,				
City	Balmain	State	NSW	Zip Code	2041
Country	Australia	Telephone	+61-2-9818-6633	Fax	+61-2-9819-6711

Name (Print/Type)	KIA SILVERBROOK	Registration No. (Attorney/Agent)	
Signature		Date	October 18, 2000

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision

Complete if Known

Application Number	
Filing Date	
First Named Inventor	SIMON ROBERT WALMSLEY
Examiner Name	
Group Art Unit	
Attorney Docket No.	NPA053US

TOTAL AMOUNT OF PAYMENT (\$ 525

METHOD OF PAYMENT

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to.

Deposit
Account
NumberDeposit
Account
Name
☐ Charge Any Additional Fee Required
Under 37 CFR 1.16 and 1.17

☐ Applicant claims small entity status
See 37 CFR 1.27

2. ☒ Payment Enclosed:

☒ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 710	201 355	Utility filing fee	355
106 320	206 160	Design filing fee	
107 490	207 245	Plant filing fee	
108 710	208 355	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ 355

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
12	-20** = 0	9	0
3	-3** = 0	40	0
Multiple Dependent			

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 80	202 40	Independent claims in excess of 3
104 270	204 135	Multiple dependent claim, if not paid
109 80	209 40	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$ 0

**for number previously paid, if greater, For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for <i>ex parte</i> reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 390	216 195	Extension for reply within second month	
117 890	217 445	Extension for reply within third month	
118 1,390	218 695	Extension for reply within fourth month	
128 1,890	228 945	Extension for reply within fifth month	
119 310	219 155	Notice of Appeal	
120 310	220 155	Filing a brief in support of an appeal	
121 270	221 135	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,240	241 620	Petition to revive - unintentional	
142 1,240	242 620	Utility issue fee (or reissue)	
143 440	243 220	Design issue fee	
144 600	244 300	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	160
146 710	246 355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 710	249 355	For each additional invention to be examined (37 CFR § 1.129(b))	
179 710	279 355	Request for Continued Examination (RCE)	
169 900	169 900	Request for expedited examination of a design application	

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ 160

SUBMITTED BY

Complete (if applicable)

Name (Print/Type)

Kla Silverbrook

Registration No.
(Attorney/Agent)

Telephone

+61-2-9818-6633

Signature

[Signature]

Date

October 18, 2000

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Certificate of Mailing under 37 CFR 1.8


JCS42 U.S. PRO
09/693705
10/20/00

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to:

Assistant Commissioner for Patents
Washington, D.C. 20231

on October 20, 2000

Date



Signature

MARGARET LEE

Typed or printed name of person signing Certificate

Note: Each paper must have its own certificate of mailing, or this certificate must identify each submitted paper.

New United States Patent Application
Inventors/Assignors: SIMON ROBERT WALMSLEY, PAUL
LAPSTUN, JACQUELINE ANNE LAPSTUN and KIA
SILVERBROOK
Assignee: SILVERBROOK RESEARCH PTY. LTD.
Title of Invention: "METHOD AND SYSTEM FOR MAP AND
GLOBE NAVIGATION"

Docket No.: NPA053US

Expresspost Label No. **EK285768953US**

METHOD AND SYSTEM FOR MAP AND GLOBE NAVIGATION

FIELD OF INVENTION

The present invention relates to navigation of interactive printed maps and globes.

5 CO-PENDING APPLICATIONS

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention simultaneously with the present invention:

10 NPA011US, NPA031US, NPA040US, NPA046US, NPA053US, NPA059US,
NPA064US, NPB006US, NPS004US, NPS008US, NPS013US, NPS024US,
NPPC1, UP01US, UP02US, UP03US, UP04US, UP05US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be
15 replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 15 September 2000:

20 NPA024US, NPA025US, NPA047US, NPA049US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 30 June 2000:

25 NPA014US, NPA015US, NPA022US, NPA026US, NPA038US, NPA041US,
NPA050US, NPA051US, NPA052US, NPA063US, NPA065US, NPA067US,
NPA068US, NPA069US, NPA071US, NPA072US, NPB003US, NPB004US,
30 NPB005US, NPP019US, PEC04US, PEC05US, PEC06US, PEC07US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 23 May 2000:

- | | | | | | | |
|----|-----------|-----------|-----------|-----------|-----------|-----------|
| | NPA001US, | NPA002US, | NPA004US, | NPA005US, | NPA006US, | NPA007US, |
| 5 | NPA008US, | NPA009US, | NPA010US, | NPA012US, | NPA016US, | NPA017US, |
| | NPA018US, | NPA019US, | NPA020US, | NPA021US, | NPA030US, | NPA035US, |
| | NPA048US, | NPA075US, | NPB001US, | NPB002US, | NPK002US, | NPK003US, |
| | NPK004US, | NPK005US, | NPM001US, | NPM002US, | NPM003US, | NPM004US, |
| | NPN001US, | NPP001US, | NPP003US, | NPP005US, | NPP006US, | NPP007US, |
| 10 | NPP008US, | NPP016US, | NPP017US, | NPP018US, | NPS001US, | NPS003US, |
| | NPS020US, | NPT001US, | NPT002US, | NPT003US, | NPT004US, | NPX001US, |
| | NPX003US, | NPX008US, | NPX011US, | NPX014US, | NPX016US, | IJ52US, |
| | IJM52US, | MJ10US, | MJ11US, | MJ12US, | MJ13US, | MJ14US, |
| | MJ15US, | MJ34US, | MJ47US, | MJ58US, | MJ62US, | MJ63US, |
| 15 | PAK04US, | PAK05US, | PAK06US, | PAK07US, | PAK08US, | PEC01US, |
| | PEC02US, | PEC03US | | | | |

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

BACKGROUND

Maps and globes provide a particularly intuitive basis for navigating geographic information. Maps displayed on a computer screen may support interactive navigation and geographic queries, but may suffer from the limited size and lack of resolution of the computer screen. Printed maps, while providing superior map detail, may suffer from a lack of interactivity.

SUMMARY OF INVENTION

It is an objective of the present invention to provide a new method and system for navigating a map or globe.

10 The present invention provides, in a first aspect, a method of enabling a user to designate, in a computer system, at least one geographic location, the method including the steps of:

printing a map of a geographic area, the geographic area including the at least one geographic location, the map including coded data indicative of an identity of the map and of a plurality of reference points of the map;

15 receiving, in the computer system, indicating data from a sensing device operated by the user, the indicating data regarding the identity of the map and a position of the sensing device relative to the map, the sensing device, when placed in an operative position relative to the map, sensing the indicating data using at least some of the coded data; and

20 identifying, in the computer system and from the indicating data, the at least one geographic location.

Preferably the method includes the further steps of:

25 receiving, in the computer system, movement data regarding movement of the sensing device relative to the map, the sensing device sensing its movement relative to the map using at least some of the coded data; and

identifying, in the computer system and from the movement data, a geographic region.

Preferably, the map contains at least one of the following categories of map

information:

- (a) geographic features of the geographic area;
- (b) cities in the geographic area;
- (c) countries related to the geographic area;
- 5 (d) different views of the geographic area;
- (e) topography of the geographic area;
- (f) vegetation of the geographic area;
- (g) average rainfall for the geographic area;
- (h) seasonal temperatures for the geographic area; and
- 10 (i) population for the geographical area.

Preferably, the method includes the further step of printing at least one map control, and, when the map control is designated by the user using the sensing device, performing, in the computer system, an action associated with the map control.

The action may be one of:

- 15 (a) printing information about a designated country, region, city or other geographic location or geographic area;
- (b) printing a map of a designated geographic region;
- (c) printing a distance between designated geographic locations;
- (d) printing a map of a geographic area adjoining a particular geographic
- 20 area; and
- (f) printing a scaled-up or scaled-down map of a particular geographic area.

The present invention provides, in a second aspect, a system for enabling a user to designate, in a computer system, at least one geographic location, the system including:

- 25 a map of a geographic area, the geographic area including the at least one geographic location, the map including coded data indicative of an identity of the map and of a plurality of reference points of the map;

a printer for printing the map, including the coded data, on demand; and

a computer system for receiving indicating data from a sensing device operated by the user, the indicating data regarding the identity of the map and a position of the sensing device relative to the map, the sensing device, when placed in an operative position relative to the map, sensing the indicating data using at least some of the coded data;

wherein the computer system is configured to identify, from the indicating data, the at least one geographic location.

Preferably, the system includes the sensing device, the sensing device senses its movement relative to the map using at least some of the coded data, and the computer system is configured to identify, from the movement, a geographic region.

Preferably the map contains at least one of the following categories of map information:

- (a) geographic features of the geographic area;
- (b) cities in the geographic area;
- (c) countries related to the geographic area;
- (d) different views of the geographic area;
- (e) topography of the geographic area;
- (f) vegetation of the geographic area;
- (g) average rainfall for the geographic area;
- (h) seasonal temperatures for the geographic area; and
- (i) population for the geographical area.

Preferably, the system includes a map control page including at least one printed map control, and the computer system is configured to perform an action associated with the map control when the map control is designated by the user using the sensing device.

The action may be one of:

- (a) printing information about a designated country, region, city or other

geographic location or geographic area;

- (b) printing a map of a designated geographic area;
- (c) printing a distance between designated geographic locations;
- (d) printing a map of a geographic area adjoining a particular geographic
- 5 area; and
- (f) printing a scaled-up or scaled-down map of a particular geographic area.

The present invention provides, in a third aspect, a system for enabling a user to designate, in a computer system, at least one geographic location, the system including:

- 10 a globe, the globe including coded data indicative of a plurality of reference points of the globe;

a computer system for receiving indicating data from a sensing device operated by the user, the indicating data regarding a position of the sensing device relative to the surface of the globe, the sensing device, when placed in an operative position relative to

- 15 the surface of the globe, sensing the indicating data using at least some of the coded data;

wherein the computer system is configured to identify, from the indicating data, the at least one geographic location.

- Preferably, the system includes the sensing device, the sensing device senses its movement relative to the globe using at least some of the coded data, and the computer
- 20 system is configured to identify, from the movement, a geographic region.

BRIEF DESCRIPTION OF DRAWINGS

Preferred and other embodiments of the invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

- 5 Figure 1 is a schematic of a the relationship between a sample printed netpage and its online page description;

Figure 2 is a schematic view of a interaction between a netpage pen, a netpage printer, a netpage page server, and a netpage application server;

- 10 Figure 3 is a schematic view of a high-level structure of a printed netpage and its online page description;

Figure 4a is a plan view showing a structure of a netpage tag;

Figure 4b is a plan view showing a relationship between a set of the tags shown in Figure 4a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5a is a plan view showing an alternative structure of a netpage tag;

- 15 Figure 5b is a plan view showing a relationship between a set of the tags shown in Figure 5a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5c is a plan view showing an arrangement of nine of the tags shown in Figure 5a where targets are shared between adjacent tags;

- 20 Figure 5d is a plan view showing the interleaving and rotation of the symbols of the four codewords of the tag shown in Figure 5a;

Figure 6 is a schematic view of a set of user interface flow document icons;

Figure 7 is a schematic view of a set of user interface page layout element icons;

Figure 8 is a schematic view of a map class diagram;

Figure 9 is a schematic view of a location information class diagram;

- 25 Figure 10 is a schematic view of a clipboard class diagram;

Figure 11 is a schematic view of a guessing game class diagram;

Figure 12 is a schematic view of a schematic view of a map control user interface flow;

Figure 13 is a schematic view of a map control page;

Figure 14 is a schematic view of an information page; and

Figure 15 is a schematic view of a map page.

FIG. 13 is a schematic view of a map control page; FIG. 14 is a schematic view of an information page; and FIG. 15 is a schematic view of a map page.

DETAILED DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

Note: Memjet™ is a trademark of Silverbrook Research Pty Ltd, Australia.

In the preferred embodiment, the invention is configured to work with the netpage networked computer system, a summary of which is given below and a detailed description of which is given in our earlier applications, including in particular applications USSN 09/_____ (docket no. NPT002US), USSN 09/_____ (docket no. NPS001US), USSN 09/_____ (docket no. NPP003US), USSN 09/_____ (docket no. NPA002US) and USSN 09/_____ (docket no. IJ52US). It will be appreciated that not every implementation will necessarily embody all or even most of the specific details and extensions described in these applications in relation to the basic system. However, the system is described in its most complete form to assist in understanding the context in which the preferred embodiments and aspects of the present invention operate.

In brief summary, the preferred form of the netpage system employs a computer interface in the form of a mapped surface, that is, a physical surface which contains references to a map of the surface maintained in a computer system. The map references can be queried by an appropriate sensing device. Depending upon the specific implementation, the map references may be encoded visibly or invisibly, and defined in such a way that a local query on the mapped surface yields an unambiguous map reference both within the map and among different maps. The computer system can contain information about features on the mapped surface, and such information can be retrieved based on map references supplied by a sensing device used with the mapped surface. The information thus retrieved can take the form of actions which are initiated by the computer system on behalf of the operator in response to the operator's interaction with the surface features.

In its preferred form, the netpage system relies on the production of, and human interaction with, netpages. These are pages of text, graphics and images printed on ordinary paper or other media, but which work like interactive web pages. Information is encoded on each page using ink which is substantially invisible to the unaided human eye. The ink, however, and thereby the coded data, can be sensed by an optically imaging pen and transmitted to the netpage system.

In the preferred form, active buttons and hyperlinks on each page can be clicked with the pen to request information from the network or to signal preferences to a network server. In one embodiment, text written by hand on a netpage is automatically recognized and converted to computer text in the netpage system, allowing forms to be filled in. In other embodiments, signatures recorded on a netpage are automatically verified, allowing e-commerce transactions to be securely authorized.

As illustrated in Figure 1, a printed netpage 1 can represent a interactive form which can be filled in by the user both physically, on the printed page, and “electronically”, via communication between the pen and the netpage system. The example shows a “Request” form containing name and address fields and a submit button. The netpage consists of graphic data 2 printed using visible ink, and coded data 3 printed as a collection of tags 4 using invisible ink. The corresponding page description 5, stored on the netpage network, describes the individual elements of the netpage. In particular it describes the type and spatial extent (zone) of each interactive element (i.e. text field or button in the example), to allow the netpage system to correctly interpret input via the netpage. The submit button 6, for example, has a zone 7 which corresponds to the spatial extent of the corresponding graphic 8.

As illustrated in Figure 2, the netpage pen 101, a preferred form of which is described in our earlier application USSN 09/_____ (docket no. NPS001US), works in conjunction with a netpage printer 601, an Internet-connected printing appliance for home, office or mobile use. The pen is wireless and communicates securely with the netpage printer via a short-range radio link 9.

The netpage printer 601, preferred forms of which are described in our earlier application USSN 09/_____ (docket no. NPP003US) and our co-filed application USSN 09/_____ (docket no. NPS024US), is able to deliver, periodically or on demand, personalized newspapers, magazines, catalogs, brochures and other publications, all printed at high quality as interactive netpages. Unlike a personal computer, the netpage printer is an appliance which can be, for example, wall-mounted adjacent to an area where the morning news is first consumed, such as in a user’s kitchen, near a breakfast table, or near the household’s point of departure for the day. It also comes in tabletop, desktop, portable and miniature versions.

Netpages printed at their point of consumption combine the ease-of-use of paper with the timeliness and interactivity of an interactive medium.

As shown in Figure 2, the netpage pen 101 interacts with the coded data on a printed netpage 1 and communicates, via a short-range radio link 9, the interaction to a netpage printer. The printer 601 sends the interaction to the relevant netpage page server 10 for interpretation. In appropriate circumstances, the page server sends a corresponding message to application computer software running on a netpage application server 13. The application server may in turn send a response which is printed on the originating printer.

The netpage system is made considerably more convenient in the preferred embodiment by being used in conjunction with high-speed microelectromechanical system (MEMS) based inkjet (Memjet™) printers, for example as described in our earlier application USSN 09/_____ (docket no. IJ52US). In the preferred form of this technology, relatively high-speed and high-quality printing is made more affordable to consumers. In its preferred form, a netpage publication has the physical characteristics of a traditional newsmagazine, such as a set of letter-size glossy pages printed in full color on both sides, bound together for easy navigation and comfortable handling.

The netpage printer exploits the growing availability of broadband Internet access. The netpage printer can also operate with slower connections, but with longer delivery times and lower image quality. The netpage system can also be enabled using existing consumer inkjet and laser printers, although the system will operate more slowly and will therefore be less acceptable from a consumer's point of view. In other embodiments, the netpage system is hosted on a private intranet. In still other embodiments, the netpage system is hosted on a single computer or computer-enabled device, such as a printer.

Netpage publication servers 14 on the netpage network are configured to deliver print-quality publications to netpage printers. Periodical publications are delivered automatically to subscribing netpage printers via pointcasting and multicasting Internet protocols. Personalized publications are filtered and formatted according to individual user profiles.

A netpage printer can be configured to support any number of pens, and a pen

can work with any number of netpage printers. In the preferred implementation, each netpage pen has a unique identifier. A household may have a collection of colored netpage pens, one assigned to each member of the family. This allows each user to maintain a distinct profile with respect to a netpage publication server or application
5 server.

A netpage pen can also be registered with a netpage registration server 11 and linked to one or more payment card accounts. This allows e-commerce payments to be securely authorized using the netpage pen. The netpage registration server compares the signature captured by the netpage pen with a previously registered signature, allowing it
10 to authenticate the user's identity to an e-commerce server. Other biometrics can also be used to verify identity. A version of the netpage pen includes fingerprint scanning, verified in a similar way by the netpage registration server.

Although a netpage printer may deliver periodicals such as the morning newspaper without user intervention, it can be configured never to deliver unsolicited
15 junk mail. In its preferred form, it only delivers periodicals from subscribed or otherwise authorized sources. In this respect, the netpage printer is unlike a fax machine or e-mail account which is visible to any junk mailer who knows the telephone number or e-mail address.

Each object model in the system is described using a Unified Modeling
20 Language (UML) class diagram. A class diagram consists of a set of object classes connected by relationships, and two kinds of relationships are of interest here: associations and generalizations. An association represents some kind of relationship between objects, i.e. between instances of classes. A generalization relates actual classes, and can be understood in the following way: if a class is thought of as the set of all
25 objects of that class, and class A is a generalization of class B, then B is simply a subset of A. Each class is drawn as a rectangle labelled with the name of the class. It contains a list of the attributes of the class, separated from the name by a horizontal line, and a list of the operations of the class, separated from the attribute list by a horizontal line. In the class diagrams which follow, however, operations are never modelled. An association is
30 drawn as a line joining two classes, optionally labelled at either end with the multiplicity of the association. The default multiplicity is one. An asterisk (*) indicates a multiplicity

of “many”, i.e. zero or more. Each association is optionally labelled with its name, and is also optionally labelled at either end with the role of the corresponding class. An open diamond indicates an aggregation association (“is-part-of”), and is drawn at the aggregator end of the association line. A generalization relationship (“is-a”) is drawn as a solid line joining two classes, with an arrow (in the form of an open triangle) at the generalization end. When a class diagram is broken up into multiple diagrams, any class which is duplicated is shown with a dashed outline in all but the main diagram which defines it. It is shown with attributes only where it is defined.

Netpages are the foundation on which a netpage network is built. They provide a paper-based user interface to published information and interactive services. A netpage consists of a printed page (or other surface region) invisibly tagged with references to an online description of the page. The online page description is maintained persistently by a netpage page server. The page description describes the visible layout and content of the page, including text, graphics and images. It also describes the input elements on the page, including buttons, hyperlinks, and input fields. A netpage allows markings made with a netpage pen on its surface to be simultaneously captured and processed by the netpage system.

Multiple netpages can share the same page description. However, to allow input through otherwise identical pages to be distinguished, each netpage is assigned a unique page identifier. This page ID has sufficient precision to distinguish between a very large number of netpages.

Each reference to the page description is encoded in a printed tag. The tag identifies the unique page on which it appears, and thereby indirectly identifies the page description. The tag also identifies its own position on the page. Characteristics of the tags are described in more detail below.

Tags are printed in infrared-absorptive ink on any substrate which is infrared-reflective, such as ordinary paper. Near-infrared wavelengths are invisible to the human eye but are easily sensed by a solid-state image sensor with an appropriate filter.

A tag is sensed by an area image sensor in the netpage pen, and the tag data is transmitted to the netpage system via the nearest netpage printer. The pen is wireless and communicates with the netpage printer via a short-range radio link. Tags are sufficiently

small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless. Tags are error-correctably encoded to make them partially tolerant to surface damage.

- 5 The netpage page server maintains a unique page instance for each printed netpage, allowing it to maintain a distinct set of user-supplied values for input fields in the page description for each printed netpage.

- 10 The relationship between the page description, the page instance, and the printed netpage is shown in Figure 3. The printed netpage may be part of a printed netpage document 45. The page instance is associated with both the netpage printer which printed it and, if known, the netpage user who requested it.

- 15 In a preferred form, each tag identifies the region in which it appears, and the location of that tag within the region. A tag may also contain flags which relate to the region as a whole or to the tag. One or more flag bits may, for example, signal a tag sensing device to provide feedback indicative of a function associated with the immediate area of the tag, without the sensing device having to refer to a description of the region. A netpage pen may, for example, illuminate an "active area" LED when in the zone of a hyperlink.

- 20 In a preferred embodiment, each tag contains an easily recognized invariant structure which aids initial detection, and which assists in minimizing the effect of any warp induced by the surface or by the sensing process. The tags preferably tile the entire page, and are sufficiently small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless.

- 25 In a preferred embodiment, the region to which a tag refers coincides with an entire page, and the region ID encoded in the tag is therefore synonymous with the page ID of the page on which the tag appears. In other embodiments, the region to which a tag refers can be an arbitrary subregion of a page or other surface. For example, it can coincide with the zone of an interactive element, in which case the region ID can directly
30 identify the interactive element.

Each tag typically contains 16 bits of tag ID, at least 90 bits of region ID, and a number of flag bits. Assuming a maximum tag density of 64 per square inch, a 16-bit tag ID supports a region size of up to 1024 square inches. Larger regions can be mapped continuously without increasing the tag ID precision simply by using abutting regions and maps. The distinction between a region ID and a tag ID is mostly one of convenience. For most purposes the concatenation of the two can be considered as a globally unique tag ID. Conversely, it may also be convenient to introduce structure into the tag ID, for example to define the x and y coordinates of the tag. A 90-bit region ID allows 2^{90} ($\sim 10^{27}$ or a thousand trillion trillion) different regions to be uniquely identified. Tags may also contain type information, and a region may be tagged with a mixture of tag types. For example, a region may be tagged with one set of tags encoding x coordinates and another set, interleaved with the first, encoding y coordinates.

In one embodiment, 120 bits of tag data are redundantly encoded using a (15, 5) Reed-Solomon code. This yields 360 encoded bits consisting of 6 codewords of 15 4-bit symbols each. The (15, 5) code allows up to 5 symbol errors to be corrected per codeword, i.e. it is tolerant of a symbol error rate of up to 33% per codeword. Each 4-bit symbol is represented in a spatially coherent way in the tag, and the symbols of the six codewords are interleaved spatially within the tag. This ensures that a burst error (an error affecting multiple spatially adjacent bits) damages a minimum number of symbols overall and a minimum number of symbols in any one codeword, thus maximising the likelihood that the burst error can be fully corrected.

Any suitable error-correcting code can be used in place of a (15, 5) Reed-Solomon code, for example a Reed-Solomon code with more or less redundancy, with the same or different symbol and codeword sizes; another block code; or a different kind of code, such as a convolutional code (see, for example, Stephen B. Wicker, Error Control Systems for Digital Communication and Storage, Prentice-Hall 1995, the contents of which are herein incorporated by cross-reference).

One embodiment of the physical representation of the tag, shown in Figure 4a and described in our earlier application USSN 09/_____ (docket no. NPT002US), includes fixed target structures 15, 16, 17 and variable data areas 18. The fixed target structures allow a sensing device such as the netpage pen to detect the tag and infer its

three-dimensional orientation relative to the sensor. The data areas contain representations of the individual bits of the encoded tag data. To maximise its size, each data bit is represented by a radial wedge in the form of an area bounded by two radial lines and two concentric circular arcs. Each wedge has a minimum dimension of 8 dots at 1600 dpi and is designed so that its base (its inner arc), is at least equal to this minimum dimension. The height of the wedge in the radial direction is always equal to the minimum dimension. Each 4-bit data symbol is represented by an array of 2x2 wedges. The fifteen 4-bit data symbols of each of the six codewords are allocated to the four concentric symbol rings 18a to 18d in interleaved fashion. Symbols are allocated alternately in circular progression around the tag. The interleaving is designed to maximise the average spatial distance between any two symbols of the same codeword.

In order to support "single-click" interaction with a tagged region via a sensing device, the sensing device must be able to see at least one entire tag in its field of view no matter where in the region or at what orientation it is positioned. The required diameter of the field of view of the sensing device is therefore a function of the size and spacing of the tags. Assuming a circular tag shape, the minimum diameter of the sensor field of view 193 is obtained when the tags are tiled on a equilateral triangular grid, as shown in Figure 4b.

The tag structure just described is designed to allow both regular tilings of planar surfaces and irregular tilings of non-planar surfaces. Regular tilings are not, in general, possible on non-planar surfaces. In the more usual case of planar surfaces where regular tilings of tags are possible, i.e. surfaces such as sheets of paper and the like, more efficient tag structures can be used which exploit the regular nature of the tiling.

An alternative tag structure more suited to a regular tiling is shown in Figure 5a. The tag 4 is square and has four perspective targets 17. It is similar in structure to tags described by Bennett et al. in US Patent 5,051,746. The tag represents sixty 4-bit Reed-Solomon symbols 47, for a total of 240 bits. The tag represents each one bit as a dot 48, and each zero bit by the absence of the corresponding dot. The perspective targets are designed to be shared between adjacent tags, as shown in Figures 5b and 5c. Figure 5b shows a square tiling of 16 tags and the corresponding minimum field of view 193, which must span the diagonals of two tags. Figure 5c shows a square tiling of nine tags,

containing all one bits for illustration purposes.

Using a (15, 7) Reed-Solomon code, 112 bits of tag data are redundantly encoded to produce 240 encoded bits. The four codewords are interleaved spatially within the tag to maximize resilience to burst errors. Assuming a 16-bit tag ID as before, 5 this allows a region ID of up to 92 bits. The data-bearing dots 48 of the tag are designed to not overlap their neighbors, so that groups of tags cannot produce structures which resemble targets. This also saves ink. The perspective targets therefore allow detection of the tag, so further targets are not required.

Although the tag may contain an orientation feature to allow disambiguation of 10 the four possible orientations of the tag relative to the sensor, it is also possible to embed orientation data in the tag data. For example, the four codewords can be arranged so that each tag orientation contains one codeword placed at that orientation, as shown in Figure 5d, where each symbol is labelled with the number of its codeword (1-4) and the position of the symbol within the codeword (A-O). Tag decoding then consists of decoding one 15 codeword at each orientation. Each codeword can either contain a single bit indicating whether it is the first codeword, or two bits indicating which codeword it is. The latter approach has the advantage that if, say, the data content of only one codeword is required, then at most two codewords need to be decoded to obtain the desired data. This may be the case if the region ID is not expected to change within a stroke and is thus 20 only decoded at the start of a stroke. Within a stroke only the codeword containing the tag ID is then desired. Furthermore, since the rotation of the sensing device changes slowly and predictably within a stroke, only one codeword typically needs to be decoded per frame.

It is possible to dispense with perspective targets altogether and instead rely on 25 the data representation being self-registering. In this case each bit value (or multi-bit value) is typically represented by an explicit glyph, i.e. no bit value is represented by the absence of a glyph. This ensures that the data grid is well-populated, and thus allows the grid to be reliably identified and its perspective distortion detected and subsequently corrected during data sampling. To allow tag boundaries to be detected, each tag data 30 must contain a marker pattern, and these must be redundantly encoded to allow reliable detection. The overhead of such marker patterns is similar to the overhead of explicit

perspective targets. One such scheme uses dots positioned at various points relative to grid vertices to represent different glyphs and hence different multi-bit values (see Anoto Technology Description, Anoto April 2000).

Decoding a tag results in a region ID, a tag ID, and a tag-relative pen transform.

- 5 Before the tag ID and the tag-relative pen location can be translated into an absolute location within the tagged region, the location of the tag within the region must be known. This is given by a tag map, a function which maps each tag ID in a tagged region to a corresponding location. A tag map reflects the scheme used to tile the surface region with tags, and this can vary according to surface type. When multiple tagged regions
- 10 share the same tiling scheme and the same tag numbering scheme, they can also share the same tag map. The tag map for a region must be retrievable via the region ID. Thus, given a region ID, a tag ID and a pen transform, the tag map can be retrieved, the tag ID can be translated into an absolute tag location within the region, and the tag-relative pen location can be added to the tag location to yield an absolute pen location within the
- 15 region.

- The tag ID may have a structure which assists translation through the tag map. It may, for example, encode cartesian coordinates or polar coordinates, depending on the surface type on which it appears. The tag ID structure is dictated by and known to the tag map, and tag IDs associated with different tag maps may therefore have different
- 20 structures.

Two distinct surface coding schemes are of interest, both of which use the tag structure described earlier in this section. The preferred coding scheme uses “location-indicating” tags as already discussed. An alternative coding scheme uses “object-indicating” (or “function-indicating”) tags.

- 25 A location-indicating tag contains a tag ID which, when translated through the tag map associated with the tagged region, yields a unique tag location within the region. The tag-relative location of the pen is added to this tag location to yield the location of the pen within the region. This in turn is used to determine the location of the pen relative to a user interface element in the page description associated with the region.
- 30 Not only is the user interface element itself identified, but a location relative to the user interface element is identified. Location-indicating tags therefore trivially support the

capture of an absolute pen path in the zone of a particular user interface element.

An object-indicating (or function-indicating) tag contains a tag ID which directly identifies a user interface element in the page description associated with the region (or equivalently, a function). All the tags in the zone of the user interface element
5 identify the user interface element, making them all identical and therefore indistinguishable. Object-indicating tags do not, therefore, support the capture of an absolute pen path. They do, however, support the capture of a relative pen path. So long as the position sampling frequency exceeds twice the encountered tag frequency, the displacement from one sampled pen position to the next within a stroke can be
10 unambiguously determined. As an alternative, the netpage pen 101 can contain a pair or motion-sensing accelerometers, as described in our earlier application USSN 09/_____ (docket no. NPS001US).

With either tagging scheme, the tags function in cooperation with associated visual elements on the netpage as user interactive elements in that a user can interact
15 with the printed page using an appropriate sensing device in order for tag data to be read by the sensing device and for an appropriate response to be generated in the netpage system.

Each application user interface flow is illustrated as a collection of documents linked by command arrows. A command arrow indicates that the target document is
20 printed as a result of the user pressing the corresponding command button on the source page. Some command arrows are labelled with multiple commands separated by slashes ('/'), indicating that any one of the specified commands causes the target document to be printed. Although multiple commands may label the same command arrow, they typically have different side-effects.

25 In application terms, it is important to distinguish between netpage documents and netpage forms. Documents contain printed information, as well as command buttons which can be pressed by the user to request further information or some other action. Forms, in addition to behaving like normal documents, also contain input fields which can be filled in by the user. They provide the system with a data input mechanism. It is
30 also useful to distinguish between documents which contain generic information and documents which contain information specific to a particular interaction between the

user and an application. Generic documents may be pre-printed publications such as magazines sold at news stands or advertising posters encountered in public places. Forms may also be pre-printed, including, for example, subscription forms encountered in pre-printed publications. They may, of course, also be generated on-the-fly by a netpage printer in response to user requests. User-specific documents and forms are normally generated on the fly by a netpage printer in response to user requests. Figure 6 shows a generic document 990, a generic form 991, a user-specific document 992, and a user-specific form 993.

Netpages which participate in a user interface flow are further described by abstract page layouts. A page layout may contain various kinds of elements, each of which has a unique style to differentiate it from the others. As shown in Figure 7, these include fixed information 994, variable information 995, input fields 996, command buttons 997, draggable commands 998, and text hyperlinks or hypertext links 999.

When a user interface flow is broken up into multiple diagrams, any document which is duplicated is shown with dashed outlines in all but the main diagram which defines it.

NETPAGE MAP APPLICATION

A map can be printed as a netpage, which a user can then interact with via the netpage pen. The user can request information about geographical features, cities, countries and so on. The user can also request more detailed maps of a specified area, the distance between two locations and many other items. The netpage printer responds to each request with the information printed on a subsequent netpage. In the case of maps, successively more detailed maps can be requested, culminating in street maps where available. Many different map views are possible, showing features which include, but are not limited to topography, vegetation, annual rainfall, seasonal temperature, population and malaria incidence. Multiple map views can also be combined to form a composite map.

The user can select a number of points on a map simply by clicking on them in succession with the netpage pen. The user can also select a geographic region by circumscribing it with the netpage pen.

The surface of a globe (i.e. a sphere representing the earth) can also be printed as a netpage. Ideally the globe rolls freely on its base, rather than rotating on an axis, so that any area on its surface can be rotated into view. A cupped base may be inset with ball bearings, for example. A user can select points or regions on the globe in the same way as on a planar map. Subsequent operations, typically invoked by pressing netpage buttons, act on the selected points or the selected region. The buttons can be printed on any map application page, or may be printed on the base of the globe or on a handy command card. Different command cards can be provided for users of different sophistication, e.g. children and adults.

The globe can provide audio output as an alternative to printed output. This may be particularly appropriate for interactive guessing games. The globe can ask the user to select the country which has a certain set of attributes or contains a certain geographic feature, and can rate the choice or give a hint once the user makes a choice. Guessing games can in general involve any number of players, or just one player and the globe. These types of games could be played on a map or a globe.

Our earlier application USSN 09/_____ (docket no. NPT002US) describes in detail the tagging of the surface of a sphere.

MAP OBJECT MODEL

The Map object model revolves around a map provider, maps and location information. A map provider 500 has a unique identifier 803 and name and a number of map users 501. Each map user 501 has an alias identifier 65 unique within the scope of the map provider. Each map user 501 represents a particular netpage user 800 to the provider 500. A netpage user 800, on the other hand, can be a map user 501 of any number of providers.

The netpage registration server 11 maintains a "clipboard" for each netpage user 800 and for each netpage printer 601. The clipboard 512 provides a standard mechanism for one application to share data with another application, without the two applications having any knowledge of each other. The clipboard 512 typically holds a single data object at a time. Each clipboard object 513 has a type. The map application stores map location list objects 514 and map path objects 515 on the clipboard 512. A map location list 514 and a map path 515 both consist of lists of geographic

locations 516, each defined by a latitude and a longitude. The Clipboard class diagram is shown in Figure 10.

5 A map provider 500 can have a number of globe maps 502, each with a unique identifier, a description, and scale of the globe. A map provider also has a number of detailed maps 504. Each detailed map 504 has a unique map identifier, a description, a scale, the latitude and longitude of the top left corner of the map, a horizontal and vertical size, and a map image. The Map class diagram is shown in Figure 8.

10 A map provider has a database of location information 506 for various geographical locations and features on a map. As a minimum, the map provider has location information for countries 507, regions 509, and cities 511. Country information 507 contains the country name, information, and the country boundary 508. Region information 509 contains the region name, information, and region boundary 510. City information 511 contains the city name, information, latitude, and longitude. The Location Information class diagram is shown in Figure 9.

15 As part of the map application the map provider may provide games. An example is a guessing game where one or more players can “purchase” clues and must guess the solution country. The Guessing Game class diagram is shown in Figure 11. Each game has one or more players 517, each player 517 being a map user 501. A player 517 has an alias name, a current score and a bank balance with which to purchase clues.
20 Each game 518 has a unique identifier, a start time and a game level (novice, competent, or expert). There is one solution country 507 for each game, and a number of clues 520 relating to that country. Each clue 520 has a description, a value (the price to buy the clue), and a status indicating whether the clue has been given 521 during the game. Each guess 519 made during the game is recorded for each player so the player is not
25 penalized for making the same guess twice.

MAP APPLICATION USER INTERFACE

The user may obtain the Map Control page from a variety of links including:

- the netpage directory (i.e. via the printer’s help menu)
- the netpage user’s own bookmark
- 30 • a button on the map

- a button on the base of the globe

The Map Control user interface flow is shown in Figure 12.

Map Control Page

The netpage map (or globe) and the Map Control page 522 act as the user interface for the map application. The user selects a point on the map by clicking on it with the netpage pen. The user selects a geographic region by circumscribing it with the pen. Subsequent operations, invoked by pressing buttons printed on the control page, act on the selected points or the selected region. The Map Control page 522 is shown in Figure 13. If the user selects a point on the map and clicks the <Country Information> button 528, a page of basic information 523 about the selected country is printed, as shown in Figure 14. If the user selects a point on the map and clicks the <Region Information> button 529, a page of basic information 523 about the selected region is printed. If several regions in the application database contain the selected point, a list of regions is printed. The user then selects the desired region and an information page 523 is printed.

If the user selects a point on the map and clicks the <City Information> button 530, a page of basic information about the selected city is printed. If it is unclear which city the user requires from the point clicked, a list of cities close to the selected point is printed. The user then selects the required city and an information page is printed. If the user clicks the <Print Map> button on the information page 523, a map 524 of the current area is printed. Optionally, an information page may contain more buttons to provide more detailed information on the selected area.

If the user draws a line between two points on the map, or clicks on two map points in succession, then clicks the <Measure Distance> button 533 on the Map Control page the application calculates the distance between the two points and prints a Distance Information page 525. If the user draws a line between two points on a globe, the distance along a great circle arc between the two points is measured.

The user can search for a location or geographical feature by entering the search text in the search field on the Map Control page and clicking the <Search> button 534. The search text is converted to text using handwriting recognition. A search

results page 526 is printed listing the feature name, country, latitude, and longitude of all matches found by the application. Optionally, the application allows the user to print a map of the desired area from the search results page.

5 The map or globe is implemented as a drawing field with the “submit delta” set on. Each time the user clicks on a point or draws a stroke the input is sent to the application. The latitude and longitude of each point in the stroke is determined via the map’s tag map. The latitude and longitude of each city known to the application is recorded in its geographic database. If the user selects <City Information> the application determines which city or cities lie near the designated point.

10 Country and region borders are stored in the application’s database as polygons, using a latitude- and longitude-based coordinate system. The application uses common computational geometry techniques to determine which boundary polygon a point lies within. If the user selects <Country Information> or <Print Country Map> the application determines which country boundary the selected point lies within. If the user
15 selects <Region Information> the application determines which region boundary (or boundaries) the selected point lies within.

Area Maps

If the user selects a point on a map or globe and clicks the <Print Country Map> button, a map 524 of the selected country is printed. The user may also print a
20 map 524 of the selected location (country, region, or city) by clicking the <Print Map> button on the Information page, as shown in Figure 14. To print a map of a specific area, the user selects the area by circumscribing it with the pen and clicking <Print Area Map> 532. The map provider may have many maps covering a particular area at several scales. The application determines which of its detailed maps fully enclose the selected area.
25 The smallest scale map (i.e. the map with the most detail) which fully encloses the selected area is printed. An example map page is shown in Figure 15.

The printed map page 524 shows the map description, the latitude and longitude of the point clicked (not shown for an area map), the map image, and the scale of the map. Optionally each map may have a legend printed either on the bottom of the
30 map page, or on the back of the page. The user can print adjoining maps by clicking on a <Next Map> button at any map edge.

- The user can zoom in to a particular area of the current map by clicking on a point of the map and clicking <Zoom In>. A new map 524 is printed, centered on the point selected, in the next smaller scale available. The user can zoom out from this map by clicking <Zoom Out>. A new map is printed in the next larger scale available, centered on the current map. The user can zoom in to a particular area of the current map by circumscribing an area with the pen and clicking <Print Area Map>. The application's most detailed map of the circumscribed area is printed.

Guessing Game

- A user can play geographical guessing games using a globe (or a map) and a game control page. The user starts a game by clicking the <Play Game> button 535 on the Map Control page and a Game Start page 527 is printed which shows the game identifier and a list of players. The players are identified by their netpage pens and a new player can join the game by entering a player alias (optional) and clicking the <New Player> button. An updated Game Start page 527 is then printed. Optionally, players who are not in the same location can specify the game identifier of the game to which they wish to join. When all players have joined the game, the player will select the desired game level and press the <Start Game> button.

- A Game Control page is then printed which contains <Buy Clue> buttons (one for each value of clue), a list of the players and their current score, a list of all clues given in the game so far, and a list of all guesses made so far. Each player can purchase a clue by clicking on the appropriate <Buy Clue> button when it is their turn to guess the country. A clue sheet is printed for the current player which shows the new clue, all clues given in the game so far, and all guesses made so far. The current player then submits a guess by clicking on the country on the globe which they think is the solution. After each guess an updated game control sheet is printed. Alternatively, audio output, utilizing a synthesized or sampled and sequenced voice, can be used to provide feedback in place of printed pages. The game continues, permitting each player to purchase a clue and submit a guess in turn, until a player submits a guess, or until all players' bank balance is zero.

Map Location Selection

- User-selected locations on a map or globe are stored by the map application on the user's clipboard. The user's clipboard 512 is stored on the registration server 11,

referenced by the user's netpage user id 60. Any application can store objects on and retrieve objects from a user's clipboard using the user's alias id 65. The registration server determines the user's netpage user id 60 from the alias id 65 and application id 803. To store an object in the user's clipboard the application must specify the object type and object value. An application can query the type of object the clipboard contains to determine whether the clipboard content is useful to the application.

The user's clipboard may have been overwritten by another application if the user has used another netpage application since selecting a map point or region. In this case the clipboard's object type is incompatible with the map application and an error is returned to the user.

If the user clicks on a point on a map the application stores this point as a latitude-longitude position in the user's clipboard, with an object of type "MapLocationList". If the clipboard already contains a "MapLocationList" object, the application appends the latitude-longitude position to the list of map locations already contained in the list, and the object is re-written to the user's clipboard.

If the user draws a path or circumscribes a region on a map, the path is stored in the user's clipboard with an object of type "MapPath". The path is stored as a list of map locations making up the path, specified in latitude-longitude coordinates.

The application also receives netpage pen clicks or pen strokes from the page server in object-relative coordinates. A map is implemented as a netpage drawing field, and a position returned from the page server is relative to the top left corner of the drawing field. The application translates each page coordinate to a latitude-longitude coordinate pair using the relevant map scale and the latitude-longitude of the map's top left corner. In the case of a globe, the latitude-longitude coordinates of each globe location are encoded in the globe surface tag map and a position passed to the application by the page server will be a latitude-longitude coordinate pair.

When the user presses a map application button, the application can retrieve the user's clipboard object type. and determines how to use the clipboard contents in the context of the button pressed by the user. For example, if the user clicks on a button which acts on a single map location (such as <Country Information>), only the last location in the map location list is used.

CONCLUSION

The present invention has been described with reference to a preferred embodiment and number of specific alternative embodiments. However, it will be appreciated by those skilled in the relevant fields that a number of other embodiments, 5 differing from those specifically described, will also fall within the spirit and scope of the present invention. Accordingly, it will be understood that the invention is not intended to be limited to the specific embodiments described in the present specification, including documents incorporated by cross-reference as appropriate. The scope of the invention is only limited by the attached claims.

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

CLAIMS

1. A method of enabling a user to designate, in a computer system, at least one geographic location, the method including the steps of:

5 printing a map of a geographic area, the geographic area including the at least one geographic location, the map including coded data indicative of an identity of the map and of a plurality of reference points of the map;

10 receiving, in the computer system, indicating data from a sensing device operated by the user, the indicating data regarding the identity of the map and a position of the sensing device relative to the map, the sensing device, when placed in an operative position relative to the map, sensing the indicating data using at least some of the coded data; and

identifying, in the computer system and from the indicating data, the at least one geographic location.

15

2. A method according to claim 1 including the further steps of:

receiving, in the computer system, movement data regarding movement of the sensing device relative to the map, the sensing device sensing its movement relative to the map using at least some of the coded data; and

20 identifying, in the computer system and from the movement data, a geographic region.

3. A method according to claim 1 wherein the map contains at least one of the following categories of map information:

- 25 (a) geographic features of the geographic area;
- (b) cities in the geographic area;
- (c) countries related to the geographic area;
- (d) different views of the geographic area;

- (e) topography of the geographic area;
- (f) vegetation of the geographic area;
- (g) average rainfall for the geographic area;
- (h) seasonal temperatures for the geographic area; and
- 5 (i) population for the geographical area.

10 4. A method according to claim 1 or claim 2 including the further step of printing at least one map control, and, when the map control is designated by the user using the sensing device, performing, in the computer system, an action associated with the map control.

5. A method according to claim 4 wherein the action is one of:

- (a) printing information about a designated country, region, city or other geographic location or geographic area;
- 15 (b) printing a map of a designated geographic region;
- (c) printing a distance between designated geographic locations;
- (d) printing a map of a geographic area adjoining a particular geographic area; and
- (f) printing a scaled-up or scaled-down map of a particular geographic area.

20 6. A system for enabling a user to designate, in a computer system, at least one geographic location, the system including:

a map of a geographic area, the geographic area including the at least one geographic location, the map including coded data indicative of an identity of the map and of a plurality of reference points of the map;

25 a printer for printing the map, including the coded data, on demand; and

a computer system for receiving indicating data from a sensing device operated by the user, the indicating data regarding the identity of the map and a position of the

sensing device relative to the map, the sensing device, when placed in an operative position relative to the map, sensing the indicating data using at least some of the coded data;

wherein the computer system is configured to identify, from the indicating data,
5 the at least one geographic location.

7. A system according to claim 6 including the sensing device, the sensing device sensing its movement relative to the map using at least some of the coded data; wherein the computer system is configured to identify, from said movement, a geographic region.

10

8. A system according to claim 7 wherein the map contains at least one of the following categories of map information:

(a) geographic features of the geographic area;

(b) cities in the geographic area;

15 (c) countries related to the geographic area;

(d) different views of the geographic area;

(e) topography of the geographic area;

(f) vegetation of the geographic area;

(g) average rainfall for the geographic area;

20 (h) seasonal temperatures for the geographic area; and

(i) population for the geographical area.

9. A system according to claim 6 or claim 7 further including a map control page including at least one printed map control; wherein the computer system is configured to
25 perform an action associated with the map control when the map control is designated by the user using the sensing device.

10. A system according to claim 9 wherein the action is one of:
- (a) printing information about a designated country, region, city or other geographic location or geographic area;
 - (b) printing a map of a designated geographic area;
 - 5 (c) printing a distance between designated geographic locations;
 - (d) printing a map of a geographic area adjoining a particular geographic area; and
 - (f) printing a scaled-up or scaled-down map of a particular geographic area.
11. A system for enabling a user to designate, in a computer system, at least one
- 10 geographic location, the system including:
- a globe, the globe including coded data indicative of a plurality of reference points of the globe;
 - a computer system for receiving indicating data from a sensing device operated by the user, the indicating data regarding a position of the sensing device relative to the
 - 15 surface of the globe, the sensing device, when placed in an operative position relative to the surface of the globe, sensing the indicating data using at least some of the coded data;
 - wherein the computer system is configured to identify, from the indicating data, the at least one geographic location.
12. A system according to claim 11 including the sensing device, the sensing device sensing its movement relative to the globe using at least some of the coded data; wherein the computer system is configured to identify, from said movement, a geographic region.
- 20

ABSTRACT

The present invention provides a method of enabling a user to designate, in a computer system, at least one geographic location, the method including the steps of printing a
5 map of a geographic area, the geographic area including the at least one geographic location, the map including coded data indicative of an identity of the map and of a plurality of reference points of the map; receiving, in the computer system, indicating data from a sensing device operated by the user, the indicating data regarding the identity of the map and a position of the sensing device relative to the map, the sensing device,
10 when placed in an operative position relative to the map, sensing the indicating data using at least some of the coded data; and identifying, in the computer system and from the indicating data, the at least one geographic location.

(Figure 8)

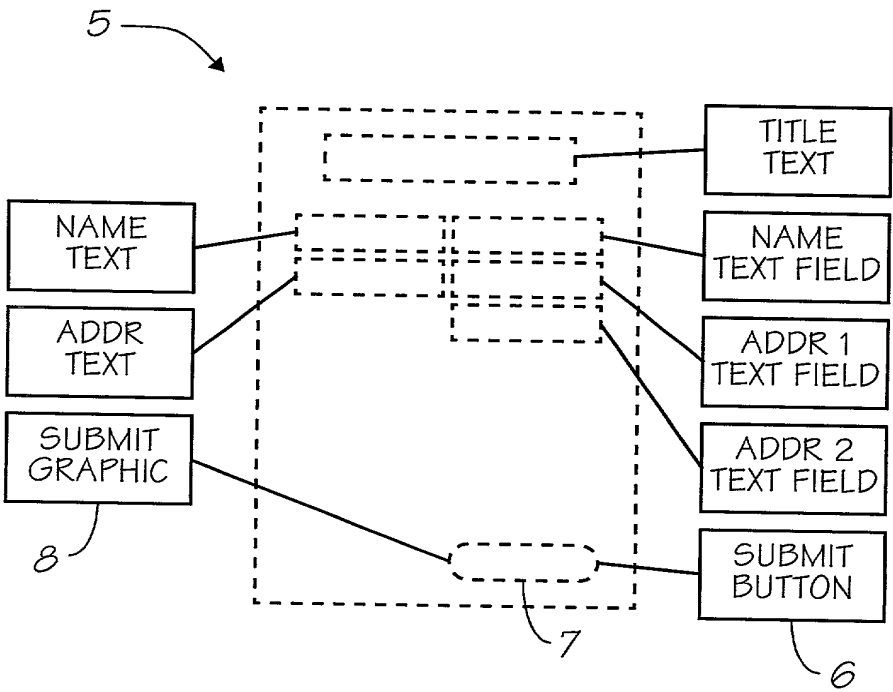
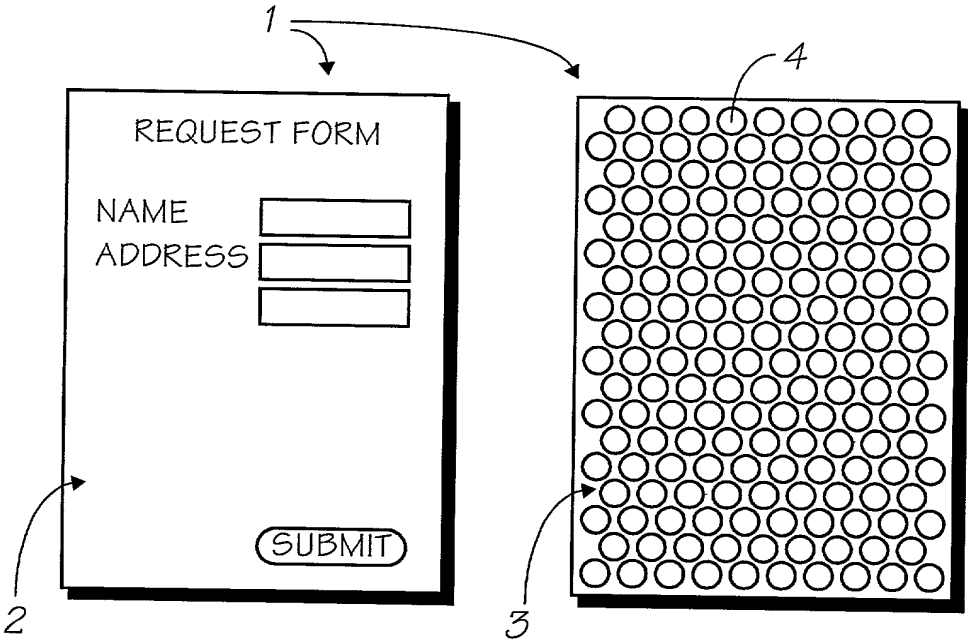


FIG. 1

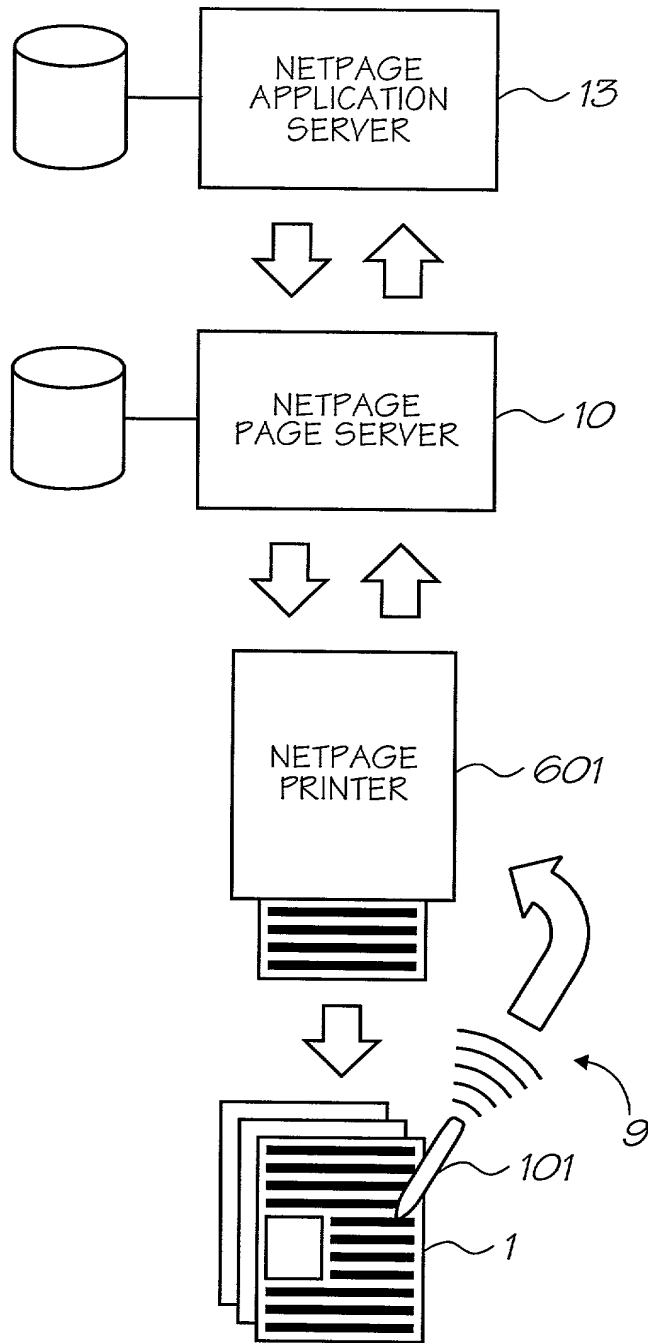


FIG. 2

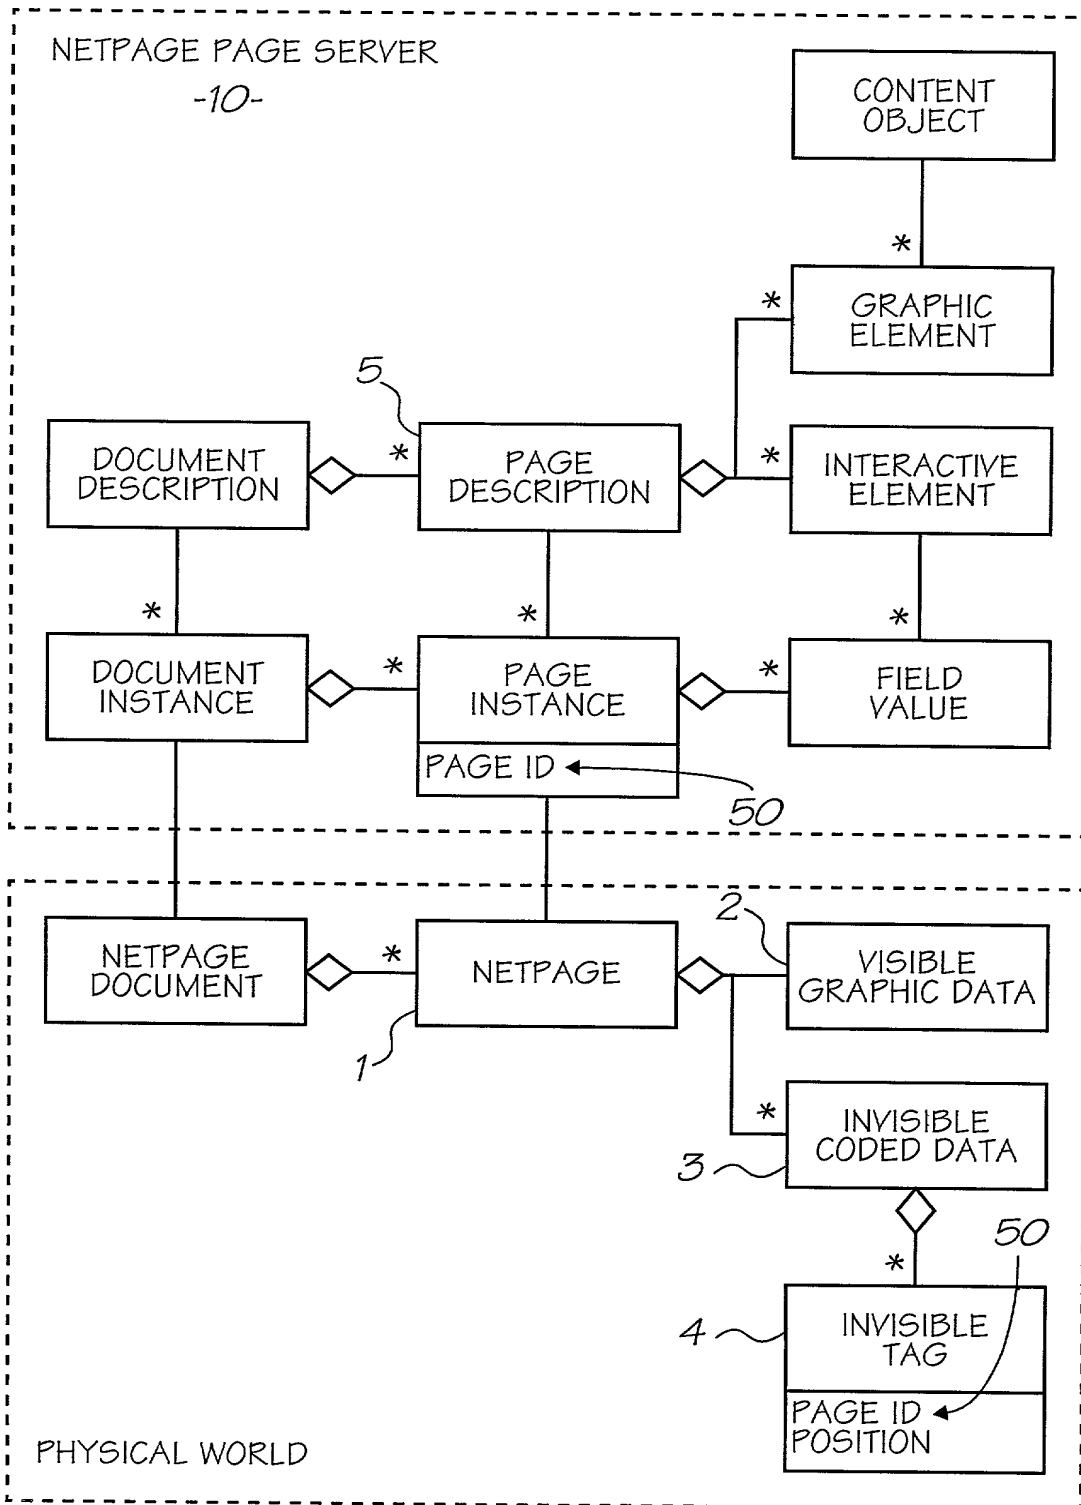


FIG. 3

4/15

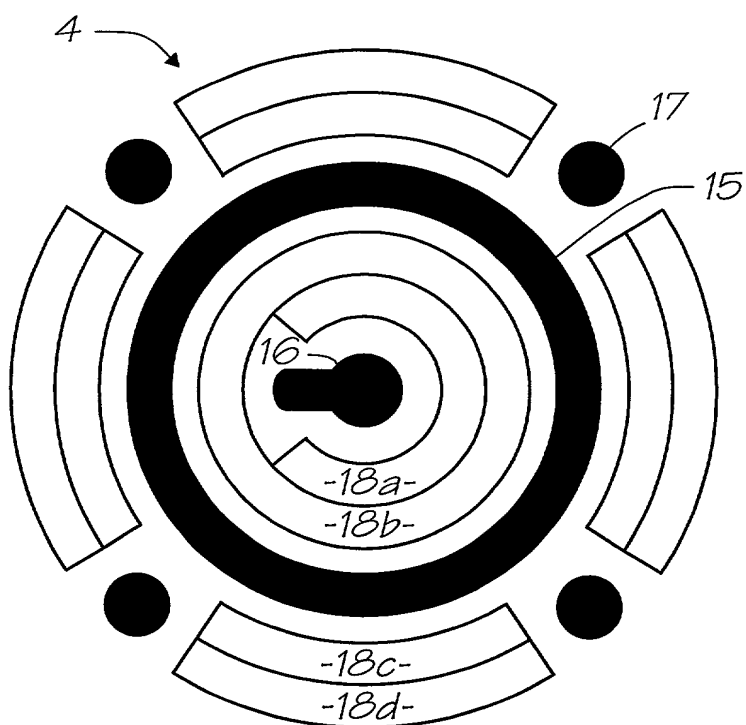


FIG. 4a

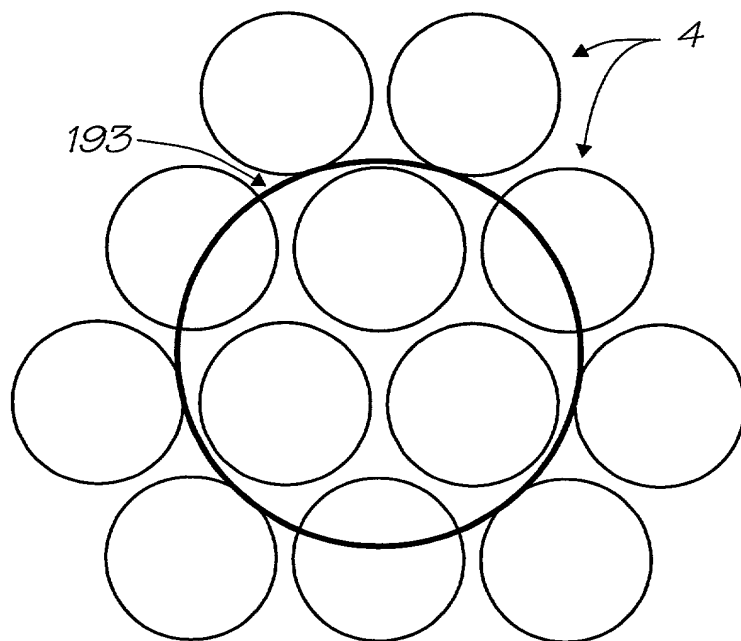


FIG. 4b

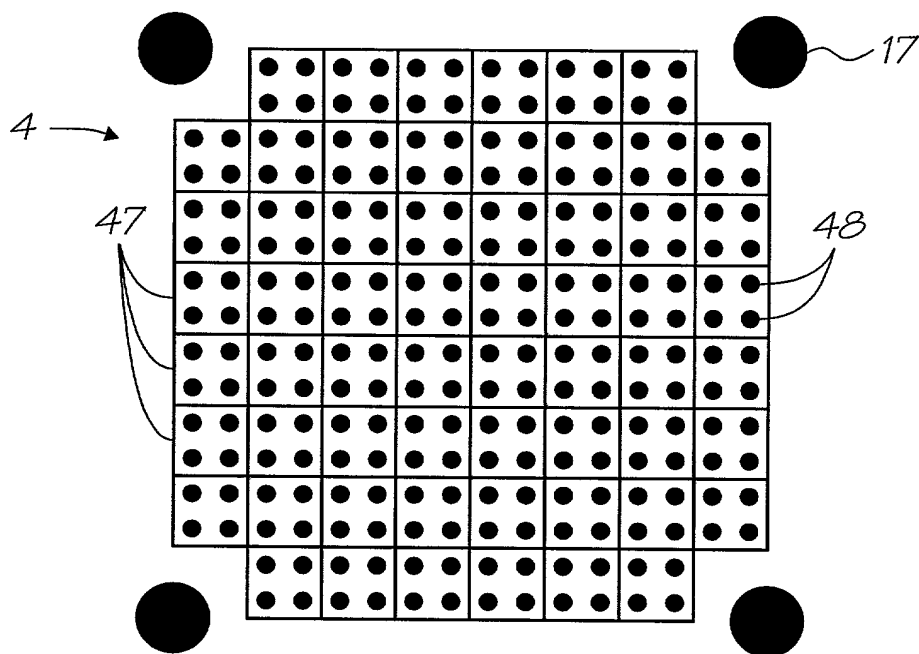


FIG. 5a

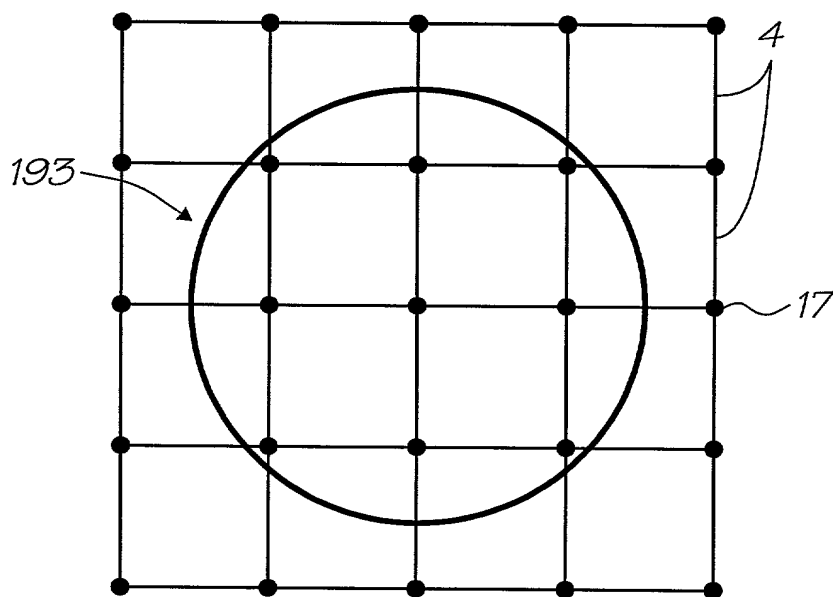


FIG. 5b

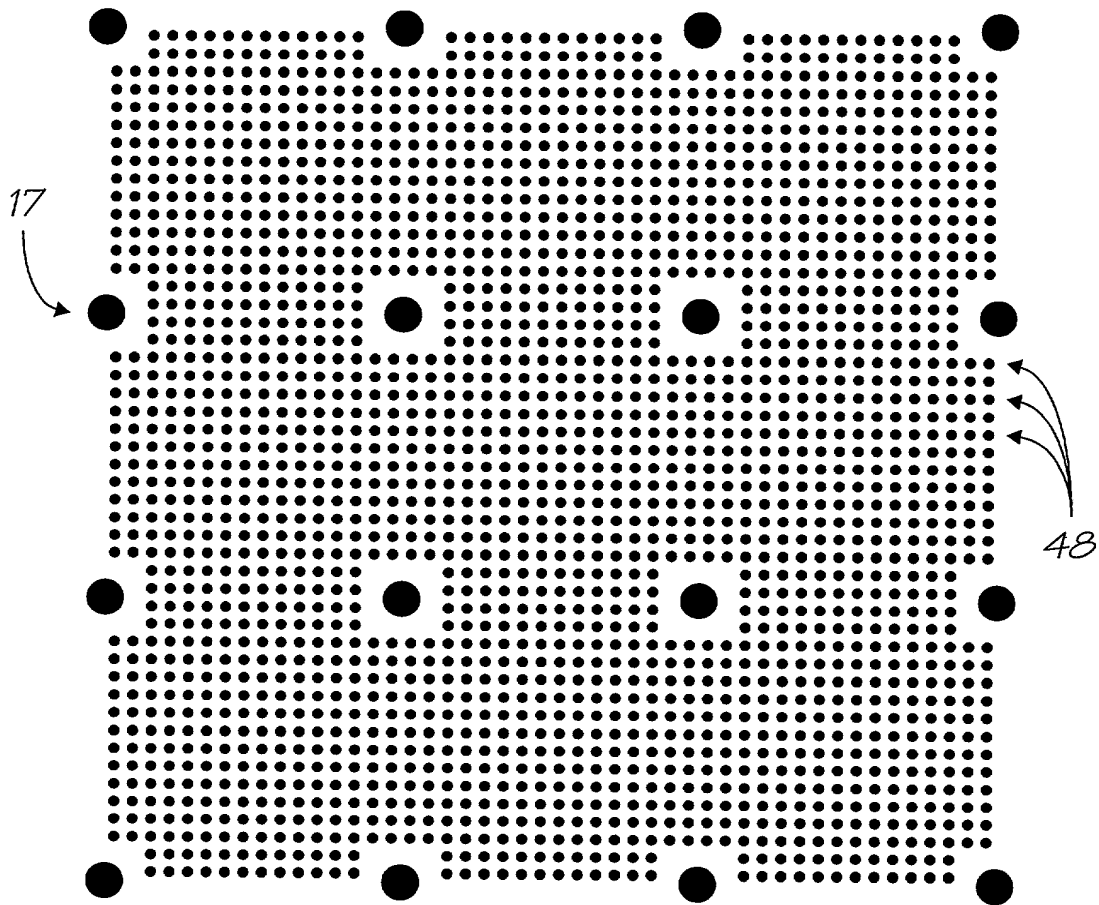


FIG. 5c

47

		1A	4G	1B	4K	1C	4O	
0E	1Z	NZ	1H	MZ	2D	1Z	2A	
4C	1D	4F	1E	4J	1F	4N	1G	
3K	MZ	1Z	2I	1Z	2E	HZ	2B	
4B	1H	4E	1I	4J	1J	MZ	1K	
3G	2N	3F	2J	3E	2F	3D	2C	
4A	1L	4D	1M	4F	1N	4H	1O	
	2O	3C	2K	3B	2G	3A		

FIG. 5d

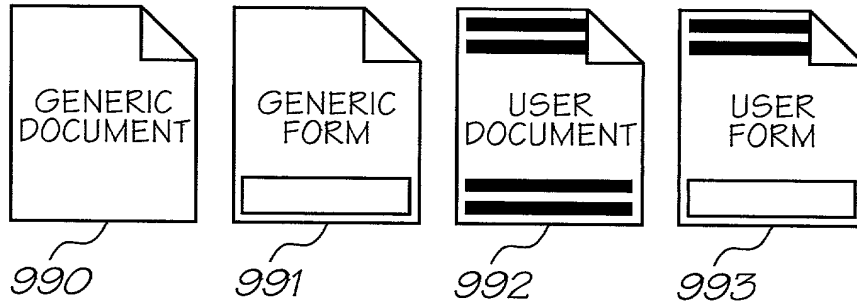


FIG. 6

FIXED INFORMATION ~ 994

VARIABLE INFORMATION ~ 995

COMMAND BUTTON ~ 996

INPUT FIELD ~ 997

DRAGGABLE COMMAND ~ 998

FIG. 7

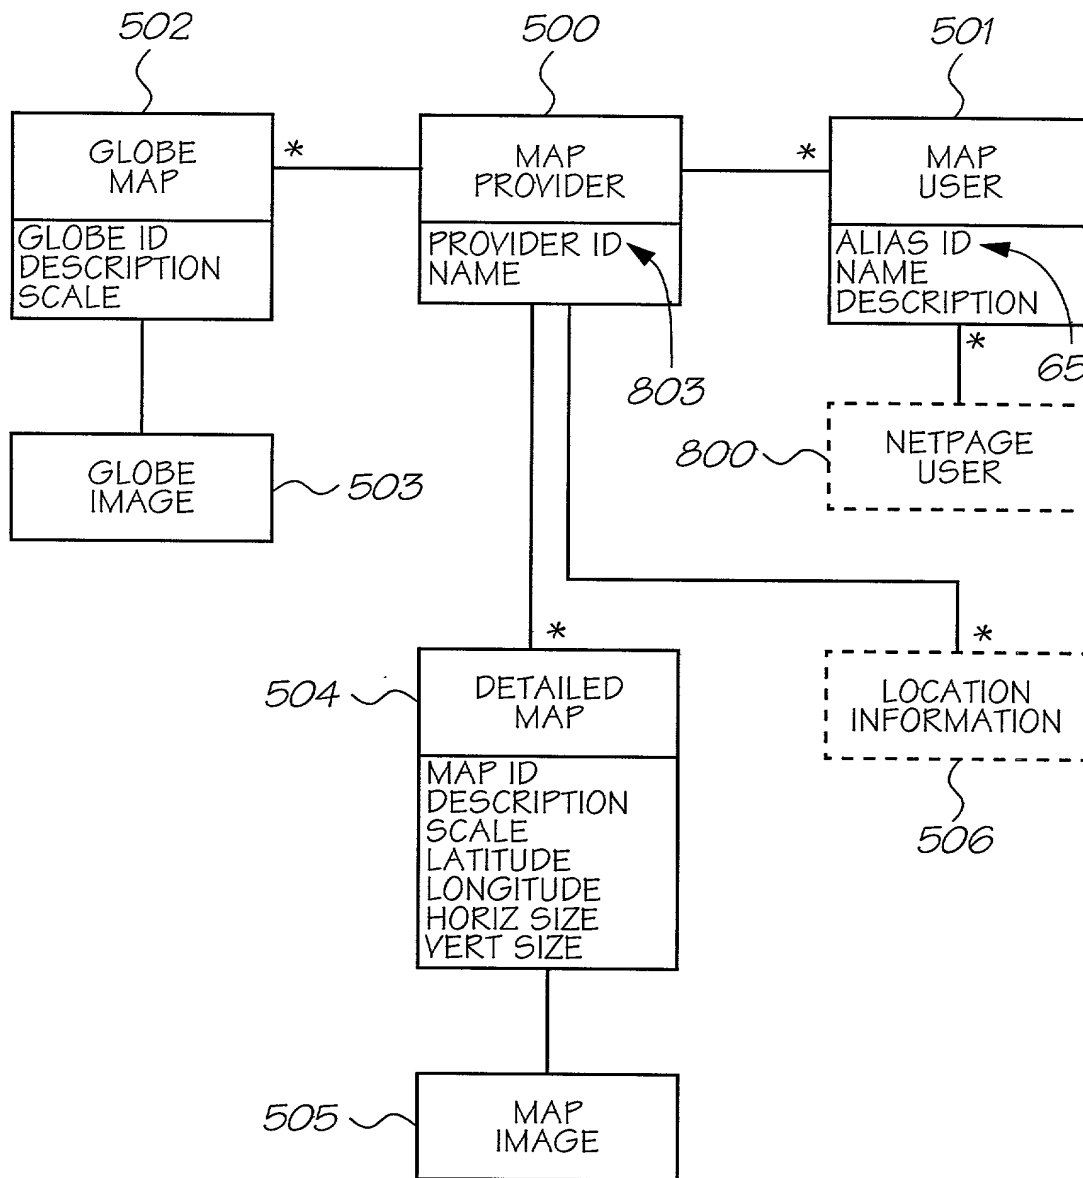


FIG. 8

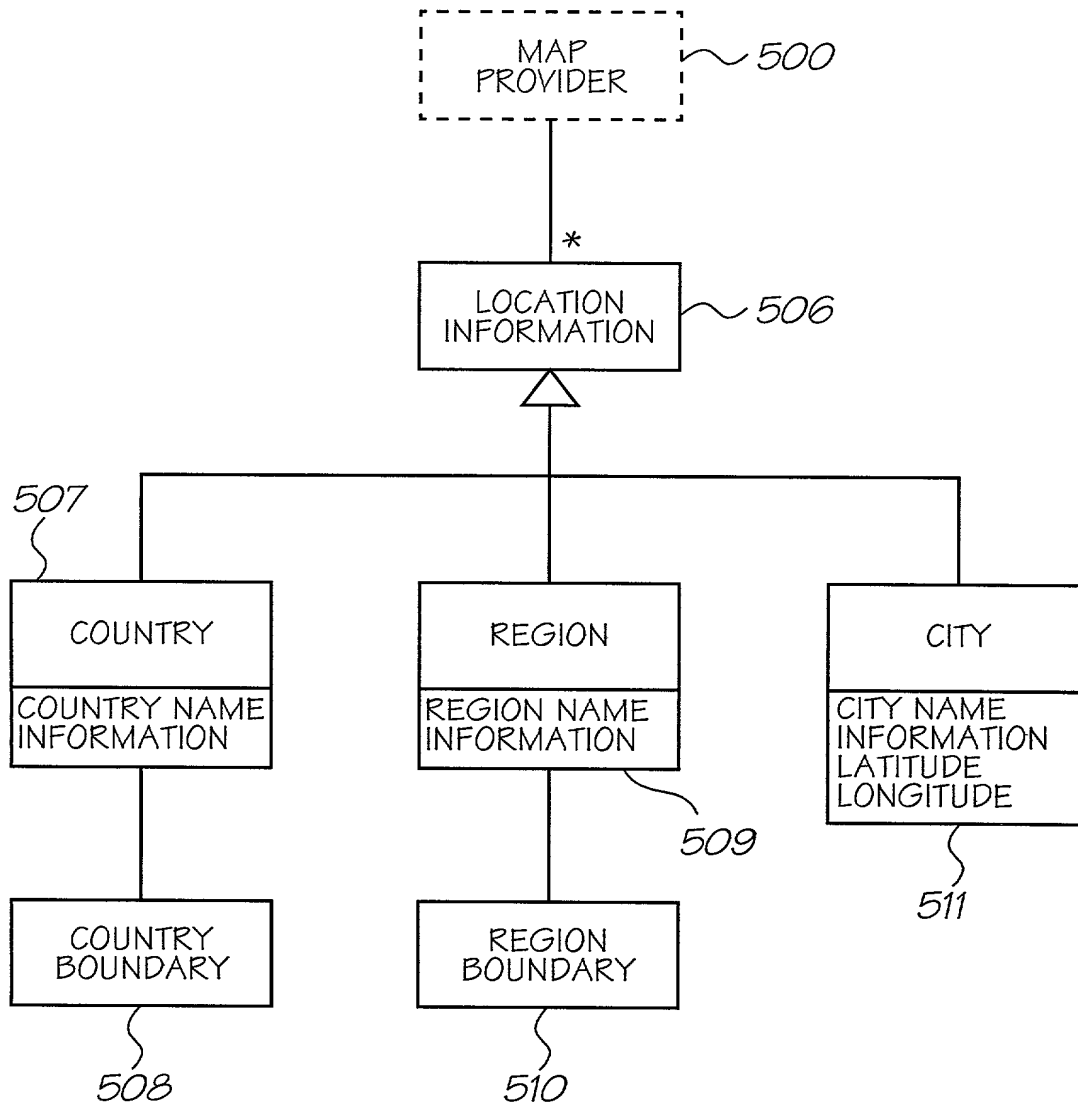


FIG. 9

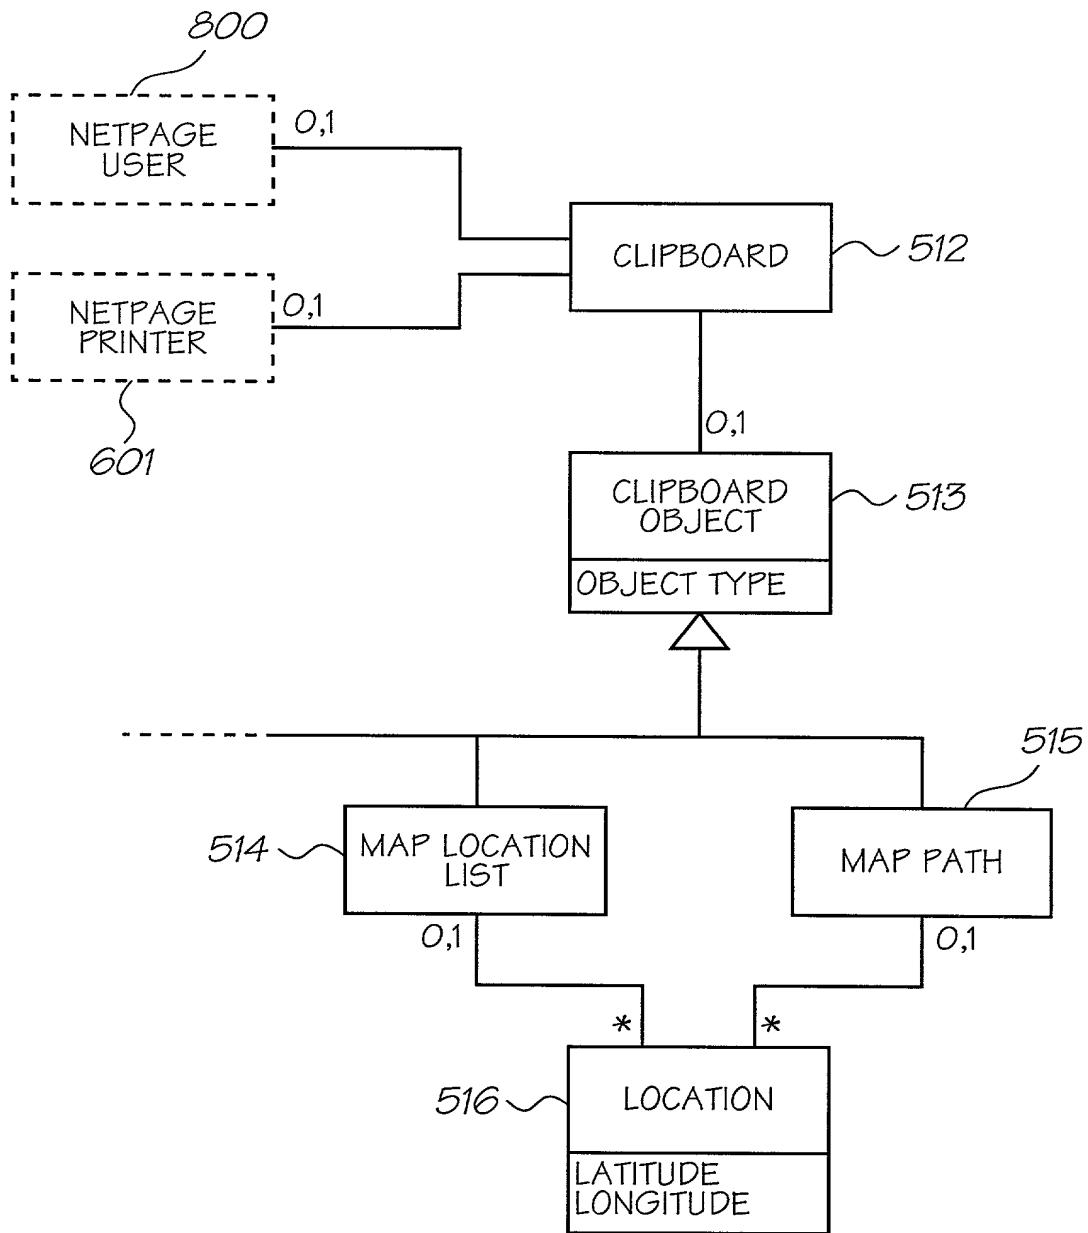


FIG. 10

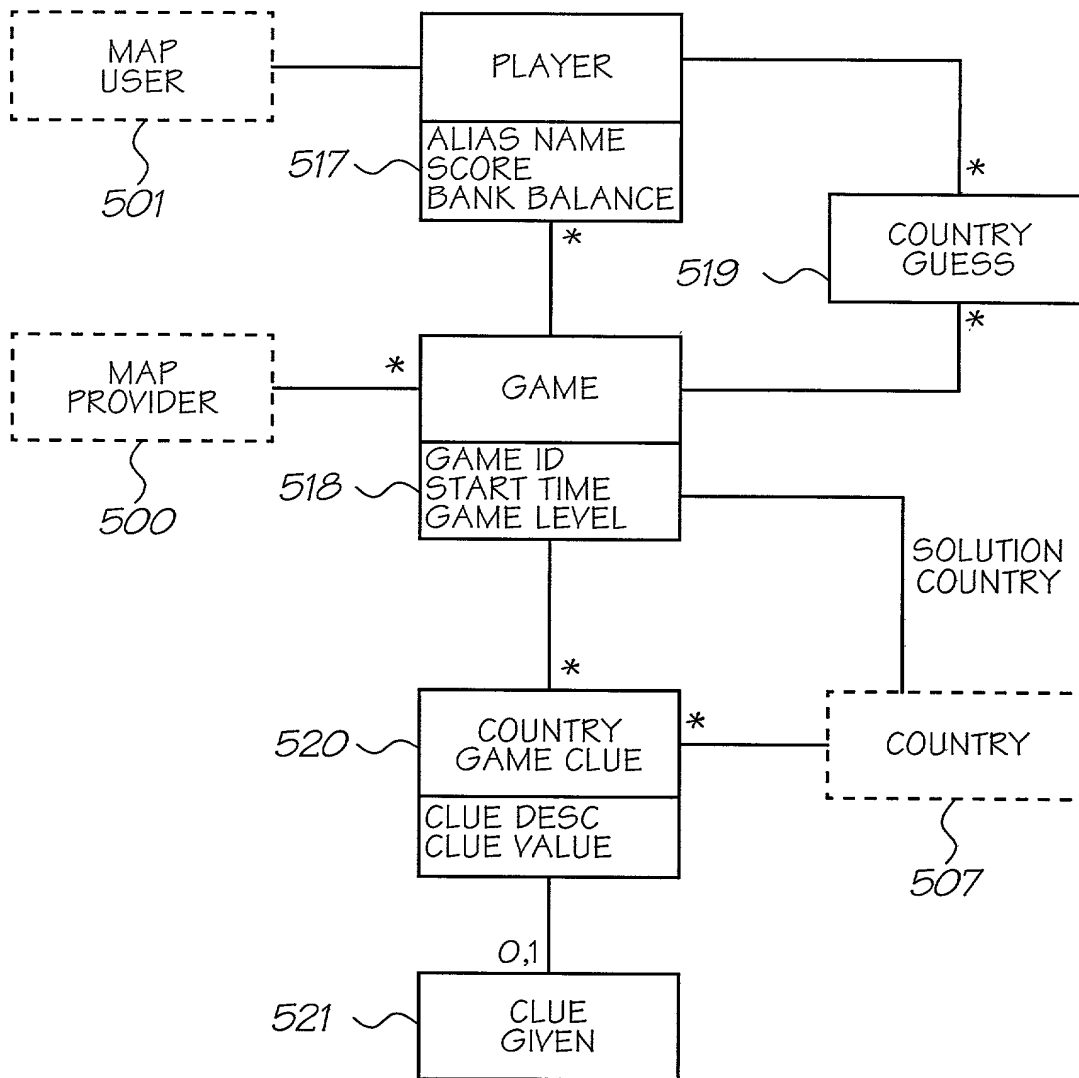


FIG. 11

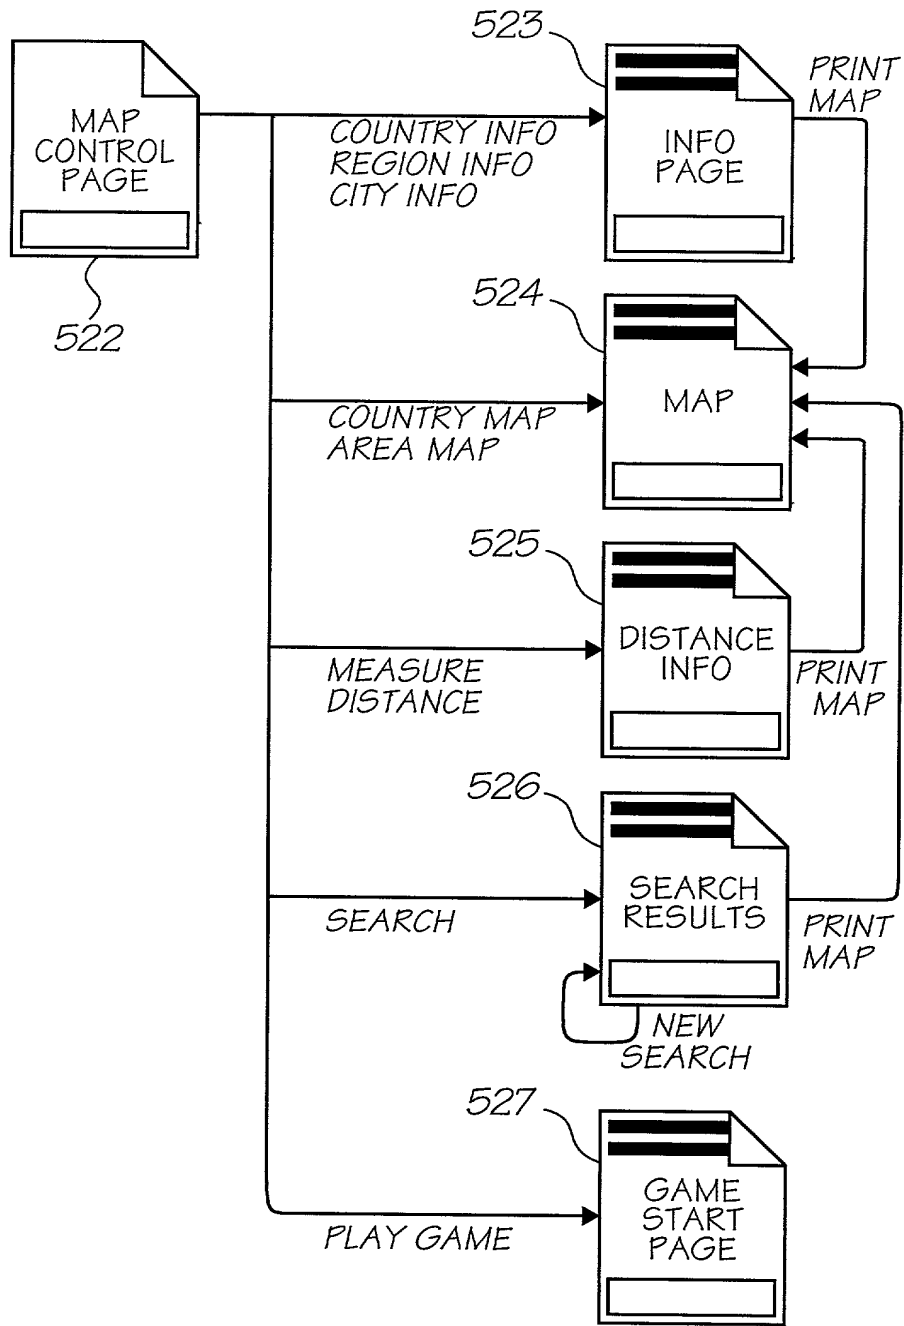


FIG. 12

MAP CONTROL PAGE PAGE 1 OF 1

CLICK ON A POINT ON THE MAP AND SELECT AN ACTION FROM BELOW

COUNTRY INFORMATION ~ 528

REGION INFORMATION ~ 529

CITY INFORMATION ~ 530

PRINT COUNTRY MAP ~ 531

TO PRINT A DETAILED MAP SELECT AN AREA OF THE MAP AND CLICK BELOW

PRINT AREA MAP ~ 532

FOR THE DISTANCE BETWEEN TWO POINTS ON THE MAP, CLICK ON TWO POINTS, OR DRAW A LINE BETWEEN THE TWO POINTS, AND CLICK BELOW

MEASURE DISTANCE ~ 533

TO SEARCH FOR A LOCATION ENTER THE SEARCH BELOW

SEARCH TEXT SEARCH ~ 534

522 ~

535 ~

RESET FORM PLAY GAME

FIG. 13

LOCATION

INFORMATION

PAGE 1 OF 1

SELECTED LOCATION:

COUNTRY / REGION / CITY NAME

YOU CLICKED ON:

LATITUDE

LONGITUDE

COUNTRY / REGION / CITY INFORMATION

523

PRINT MAP

FIG. 14

MAP

MAP DESC

PAGE 1 OF 1

YOU CLICKED ON:

LATITUDE

LONGITUDE

NEXT MAP

NEXT MAP

NEXT MAP

NEXT MAP

MAP IMAGE

NEXT MAP

SCALE

ZOOM IN

ZOOM OUT

PRINT AREA MAP

524

FIG. 15

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number		<i>NPA053US</i>
	First Named Inventor		<i>SIMON ROBERT WALMSLEY</i>
	COMPLETE IF KNOWN		
	Application Number		/
	Filing Date		
	Group Art Unit		
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing		<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	
Examiner Name			

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND SYSTEM FOR MAP AND GLOBE NAVIGATION

the specification of which (Title of the Invention)

☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
<i>PQ3632</i>	<i>Australia</i>	<i>10-25-2000</i>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
 Approved for use through 9/30/00. OMB 0651-0032
 Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label 24011 OR ☒ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633		Fax 61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))			Family Name or Surname		
SIMON ROBERT			WALMSLEY		
Inventor's Signature					Date
					Oct. 18, 2000
Residence: City	Epping	State	NSW	Country	Australia
				Citizenship	Australian
Post Office Address	Unit 3, 9 Pembroke Street				
Post Office Address					
City	Epping	State	NSW	ZIP	2121
				Country	Australia




☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)
 Approved for use through 9/30/98 OMB 0651-0032
 Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION
ADDITIONAL INVENTOR(S)
Supplemental Sheet
 Page 1 of 1

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
PAUL				LAPSTUN			
Inventor's Signature						Date	Oct. 18, 2000
Residence: City	Rodd Point	State	NSW	Country	Australia	Citizenship	Norwegian
Post Office Address	13 Duke Avenue						
Post Office Address							
City	Rodd Point	State	NSW	ZIP	2046	Country	Australia
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
JACQUELINE ANNE				LAPSTUN			
Inventor's Signature						Date	Oct. 18, 2000
Residence: City	Rodd Point	State	NSW	Country	Australia	Citizenship	Australian
Post Office Address	13 Duke Avenue						
Post Office Address							
City	Rodd Point	State	NSW	ZIP	2046	Country	Australia
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
KIA				SILVERBROOK			
Inventor's Signature						Date	Oct. 18, 2000
Residence: City	Balmain	State	NSW	Country	Australia	Citizenship	Australian
Post Office Address	393 Darling Street						
Post Office Address							
City	Balmain	State	NSW	ZIP	2041	Country	Australia

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

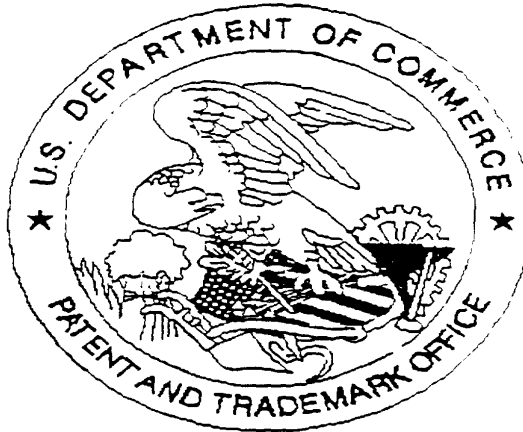

SCANNED, # 12

Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present:
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present:
for scanning. (Document title)

☐ Scanned copy is best available.

*there are 15 sheets of drawings
and 3 sheets of declaration*